
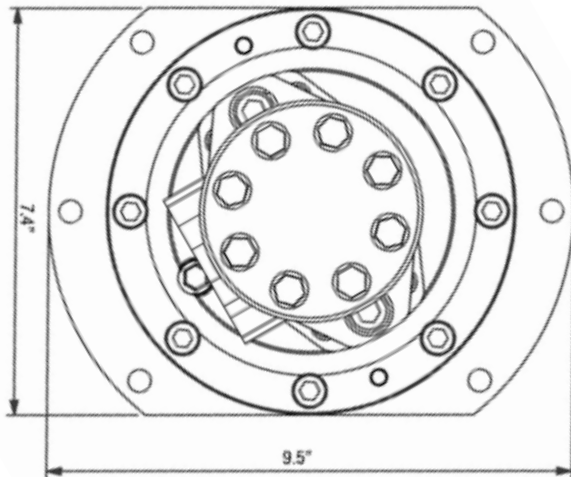


## HAND-HELD ANCHOR DRIVE

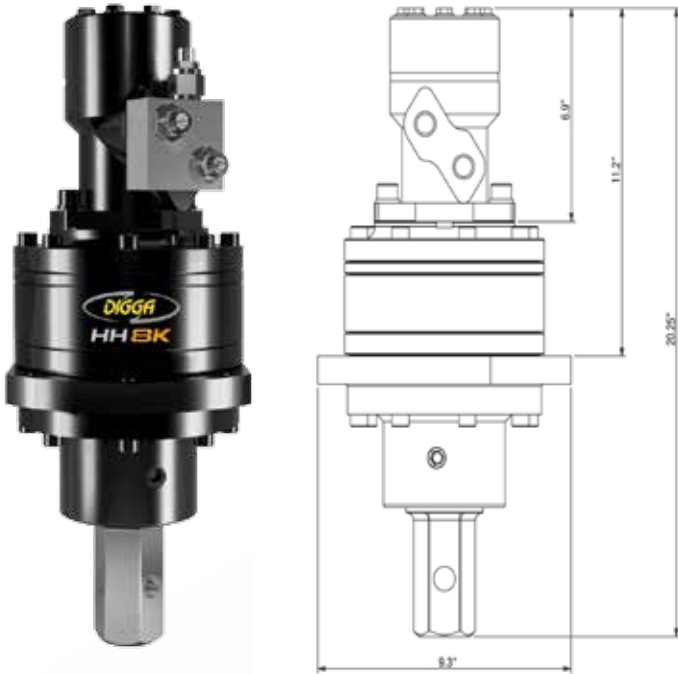

Lightweight hand-held screw anchor drive for the installation of screw piles in confined or low access sites such as crawl spaces. This unit can be powered by portable hydraulic power packs.

### Features

- Compact high torque Digga manufactured gearbox.
- Lightweight - just 90lbs for ease of movement in confined spaces
- Fitted with a high efficiency Eaton/Digga geroler hydraulic motor
- Motor mounted pressure relief valve fitted standard
- 30 years design and manufacturing experience
- 2yr gearbox and 2yr motor warranty

Specifications		
	HH-6K	HH-8K
Overall Length:	20"	20"
Diameter	9.5"	9.5"
Weight (no frame or hitch)	90 lbs	90 lbs
Max Pressure	2,100 psi	2,750 psi
Max Flow	20 gpm	20 gpm
Pressure Relief Valve Fitted	STD	STD
Standard Output Shaft	2" Hex	2" Hex

Hand held units are not suitable for machine mounting. Warranty void if used on machines.

Output Speed		
GPM	HH-6K RPM	HH-8K RPM
7	7	7
8	8	8
9	9	9
10	10	10
11	11	11
12	12	12
13	13	13
14	14	14
15	15	15
16	16	16
17	17	17
18	18	18
19	19	19

Output Torque		
PSI	HH-6K FT-LBS	HH-8K FT-LBS
500	1,554	1,554
625	1,943	1,943
750	2,331	2,331
875	2,720	2,720
1,000	3,108	3,108
1,125	3,497	3,497
1,250	3,886	3,886
1,375	4,274	4,274
1,500	4,663	4,663
1,625	5,051	5,051
1,750	5,440	5,440
1,875	5,828	5,828
2,000	6,217	6,217
2,125		6,606
2,250		6,994
2,375		7,383
2,500		7,771
2,625		8,160
2,750		8,548

Output speed and torque specifications are THEORETICAL. Speed and torque output are dependent on the overall system efficiencies associated with the prime movers hydraulic system. This document should be used for information and comparative purposes only. When determining criteria, & application specific information is required, please contact DIGGA.